
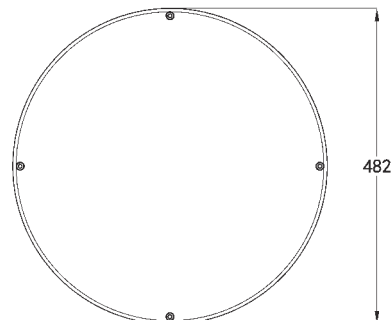


MG-LED-050C

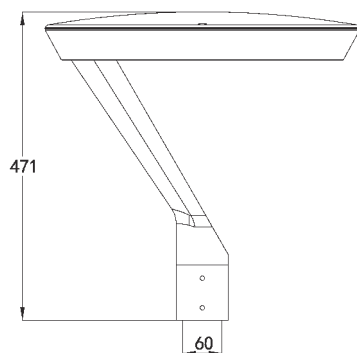

Specification:

1.LED Quantity:72pcs/108pcs 3030
2.Power:30W/60W/90W
3.Input Voltage:100-240V/277V
4.Frequency Range:50-60HZ
5.Power Factor: > 0.9
6.Color Temperature:2700-6500K

7.Color Rendering Index: > 70
8.LED Efficiency:100LM/W
9.Luminous Flux:3000LM/6000LM
/9000LM
10.Work Temperature:-30°C-60°C
11.Installation pole dia:60MM

12.Material: Die casting Aluminum Alloy
13.Diffuser:Clear Tempered Glass
14.IP Rate: IP65
15.Humidity:10%-90%
16.LED Life: > 50000h

