


Outdoor Padel Court


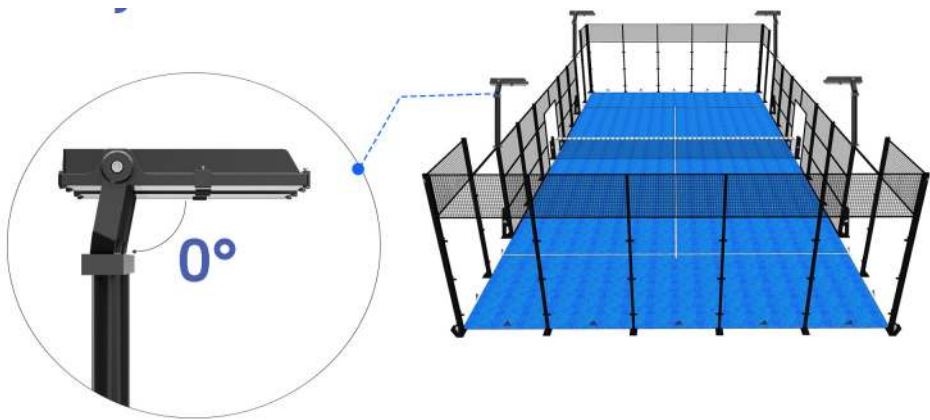


ULR 0%

totally ZERO upward light

illuminance increases by 20-40% compared to others

Revive

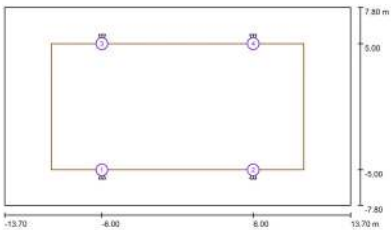

Class I, Eav>500lx, U0>0.7

Fixture	8pcs 150w 100x60
Installation	6m
	0 degree horizontal
Eav	548lx
Emin/Eav	0.75
Emin/Emax	0.64
ULR	0%
GR Max	29





Class II, Eav>300lx, U0>0.7

Fixture	4pcs 200w 100x60
Installation	6m
	0 degree horizontal
Eav	356lx
Emin/Eav	0.77
Emin/Emax	0.64
ULR	0%
GR Max	31

Indoor Padel Court



Revive

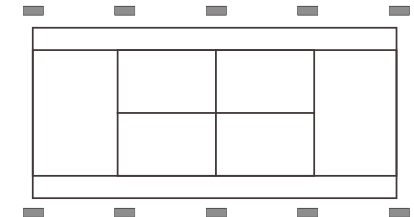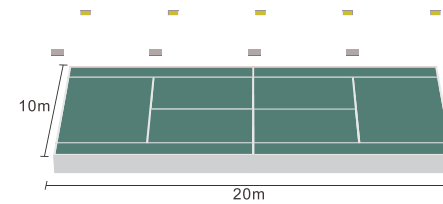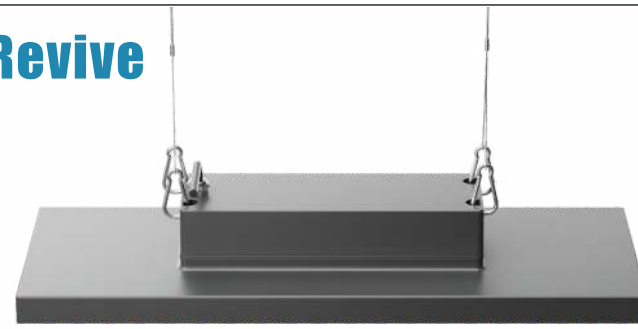

Level of competition

	Class		
	I	II	III
International/ National	●		
Regional	●	●	
Local	●	●	●
Training		●	●
Recreational			●

EN12193 Requirements

		Class		
		I	II	III
Horizontal illuminance	$\bar{E}_m$ lx	500	300	200
	$E_{min}/\bar{E}_m$	0.7	0.7	0.6
GR		50	50	55
Ra		60	60	20

Class I, $E_{av} > 500lx$, $U0 > 0.7$

Fixture	8pcs 150w 100x60
Installation	6m
	0 degree horizontal
Eav	548lx
Emin/Eav	0.75
Emin/Emax	0.64
ULR	0%
GR Max	29




Class II, $E_{av} > 300lx$, $U0 > 0.7$

Fixture	4pcs 200w 100x60
Installation	6m
	0 degree horizontal
Eav	356lx
Emin/Eav	0.77
Emin/Emax	0.64
ULR	0%
GR Max	31

Indoor Tennis Court



Revive

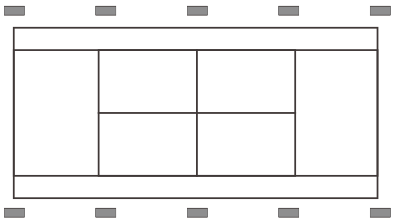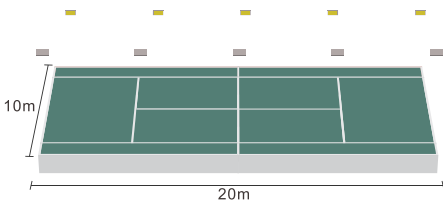

Level of competition

	Class		
	I	II	III
International/ National	●		
Regional	●	●	
Local	●	●	●
Training		●	●
Recreational			●

EN12193 Requirements

		Class		
		I	II	III
Horizontal illuminance	E_m lx	500	300	200
	E_{min}/E_m	0.7	0.7	0.6
GR		50	50	55
Ra		60	60	20


Class I, $E_{av}>500lx$, $U0>0.7$

Fixture	8pcs 150w 100x60
Installation	6m
	0 degree horizontal
Eav	548lx
Emin/Eav	0.75
Emin/Emax	0.64
ULR	0%
GR Max	29





Class II, $E_{av}>300lx$, $U0>0.7$

Fixture	4pcs 200w 100x60
Installation	6m
	0 degree horizontal
Eav	356lx
Emin/Eav	0.77
Emin/Emax	0.64
ULR	0%
GR Max	31

Navigator



Revive

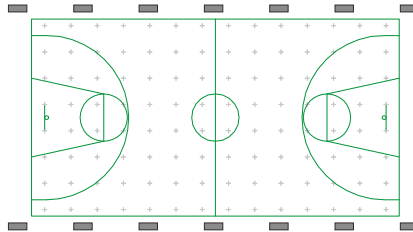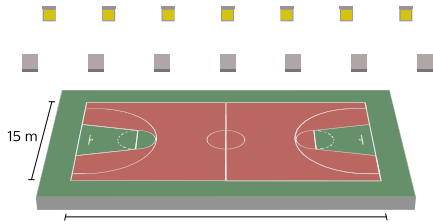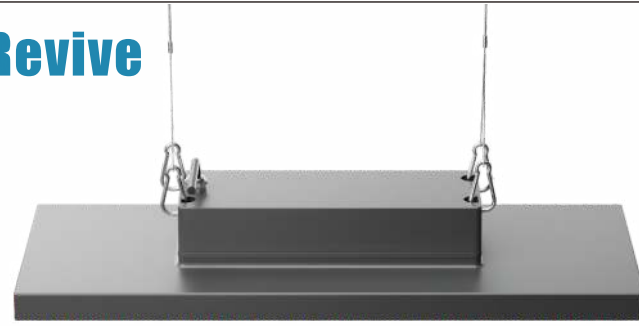

Class I, $E_{av} > 750lx$, $U_0 > 0.7$

Installation	7m
Fixture	14pcs 300w P30
E_{av}	717lx
E_{min}/E_{av}	0.84
E_{min}/E_{max}	0.76
GR Max	34

Class II, $E_{av} > 500lx$, $U_0 > 0.7$

Installation	7m
Fixture	16pcs 200w
E_{av}	527lx
E_{min}/E_{av}	0.84
E_{min}/E_{max}	0.76
GR Max	32

Class I, $E_{av} > 500lx$, $U_0 > 0.7$

Fixture	8pcs 150w 100x60
Installation	6m 0 degree horizontal
E_{av}	548lx
E_{min}/E_{av}	0.75
E_{min}/E_{max}	0.64
ULR	0%
GR Max	29

Class II, $E_{av} > 300lx$, $U_0 > 0.7$

Fixture	4pcs 200w 100x60
Installation	6m 0 degree horizontal
E_{av}	356lx
E_{min}/E_{av}	0.77
E_{min}/E_{max}	0.64
ULR	0%
GR Max	31